


CIS 5515

Design and Analysis of Algorithms

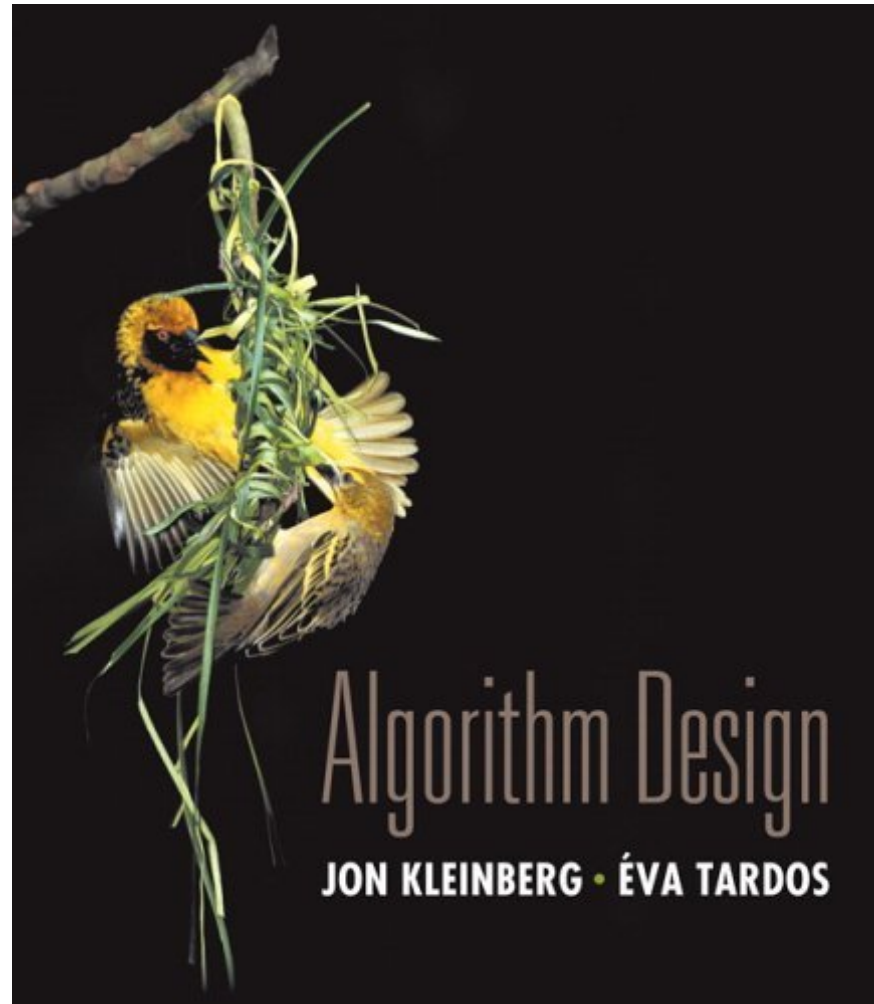

Teaching Staff

Lectures. Jie Wu

- W 5:30 - 8:00, Tuttleman 401A.

Prereq.

- CIS 5511 (Programming Techniques)



Textbook.

- *Algorithm Design* by Éva Tardos and Jon Kleinberg.

Course web site.

https://cis.temple.edu/~jiewu/teaching/spring_2019.html

Algorithms

Algorithm.


- [webster.com] A procedure for solving a mathematical problem (as of finding the greatest common divisor) in a finite number of steps that frequently involves repetition of an operation.
- [Knuth, TAOCP] An algorithm is a finite, definite, effective procedure, with some input and some output.

Great algorithms are the poetry of computation. Just like verse, they can be terse, allusive, dense, and even mysterious. But once unlocked, they cast a brilliant new light on some aspect of computing. - *Francis Sullivan*

Etymology

Etymology. [Knuth, TAOCP]

- *Algorism* = process of doing arithmetic using Arabic numerals.
- True origin: Abu 'Abd Allah Muhammad ibn Musa al-Khwarizm was a famous 9th century Persian who wrote *Kitab al-jabr wa'l-muqabala*, which evolved into today's high school algebra text.

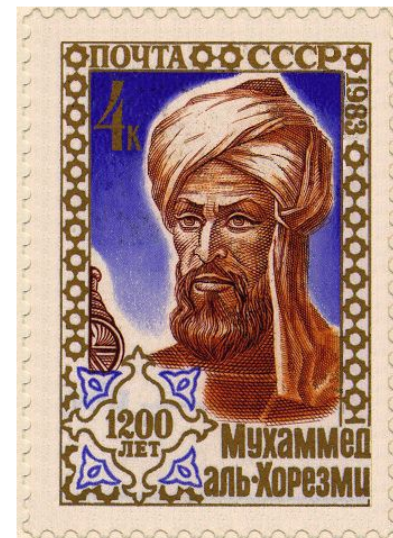

Stamp issued by the Soviet Union on Sept. 6, 1983, to mark the 1200th birth anniversary of Al'Khowârizmî.

Scope

Design and analysis of computer algorithms.

- Greedy.
- Divide-and-conquer.
- Dynamic programming.
- Network flow.
- NP and computational intractability.
- Approximation algorithms
- Adversary arguments
- ...

Critical thinking, problem-solving, and complexity analysis

Two sample examples

Algorithm design: [celebrity problem \(Oscar 2019\)](#)

- A celebrity does not know anyone while everyone knows him/her.
- Primitive operation: select A and B and then ask A if he/she knows B.
- What is the minimum number of primitive operations needed to find a celebrity in a given group of size n ?



ACADEMY
OF MOTION PICTURE
ARTS AND SCIENCES


Algorithm analysis: [runner-up team \(Super bowl 2019\)](#)

- Why no one cares about a runner-up team?
- What is the minimum number of matches needed to determine the second best team in a league of n teams?



Algorithmic Paradigms

- Randomized algorithm (Quicksort)
 - Employs a degree of randomness as part of its logic
- Parallel algorithm (Bitonicsort)
 - Can be executed on many different machines simultaneously

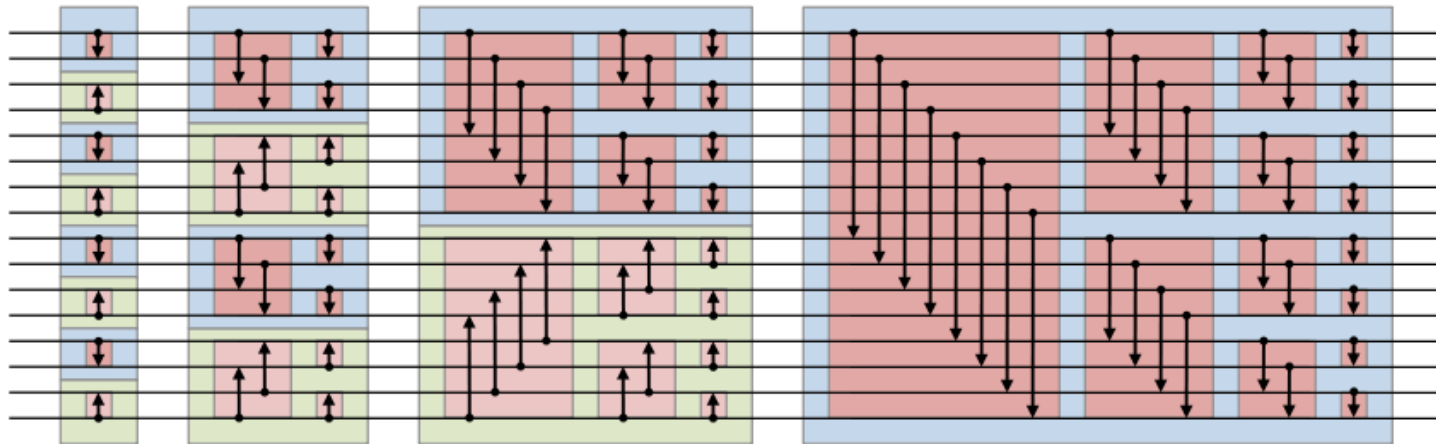


- Distributed algorithm (Blockchain)
 - Can be executed on a distributed system with no central coordinator (i.e. delay sensitive)
- Special algorithm (Algorithmic trading and Local algorithms)

Applications

Wide range of applications.

- Caching.
- Compilers.
- Databases.
- Scheduling.
- Networking.
- Data analysis.
- Signal processing.
- Computer graphics.
- Scientific computing.
- Operations research.
- Artificial intelligence.
- Computational biology.
- . . .

We focus on algorithms and techniques that are **useful in practice**.

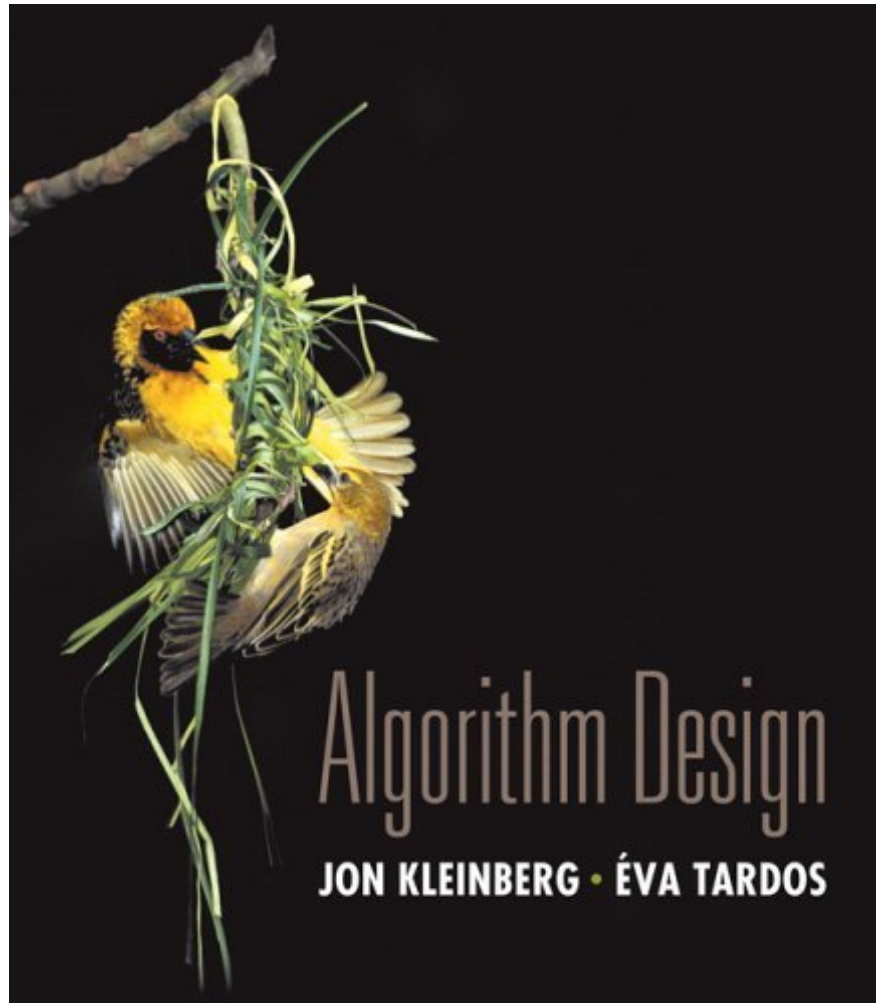

Introduction: Some Representative Problems

1.1 Dating: searching for the best mate

Searching for the best mate

Goal. Given n candidates for dating, find a "suitable" one for marriage.

- Dating in sequence.
- Accept (for marriage) or reject after each date.
- No more dating after acceptance.
- Best strategy to find a "suitable" one for marriage: **optimal stopping**

Phase 1: always reject the first n/e dates ($e = 2.71828$, natural number)

Phase 2: marry the first date better than all dates in Phase 1

$1/e$ rule (or **37% rule**). Probability of finding the best mate is $1/e$

Extensions

- Unknown n
- k mates ($k=1, 2, 3, 4, \dots$)

1.1 Matching: a stable marriage

Stable Matching Problem

Goal. Given n men and n women, find a "suitable" matching.

- Participants rate members of opposite sex.
- Each man lists women in order of preference from best to worst.
- Each woman lists men in order of preference from best to worst.

	favorite ↓		least favorite ↓
	1 st	2 nd	3 rd
Xavier	Amy	Bertha	Clare
Yancey	Bertha	Amy	Clare
Zeus	Amy	Bertha	Clare

Men's Preference Profile

	favorite ↓		least favorite ↓
	1 st	2 nd	3 rd
Amy	Yancey	Xavier	Zeus
Bertha	Xavier	Yancey	Zeus
Clare	Xavier	Yancey	Zeus

Women's Preference Profile

Stable Matching Problem

Perfect matching: everyone is matched monogamously.

- Each man gets exactly one woman.
- Each woman gets exactly one man.

Stability: no incentive for some pair of participants to undermine assignment by joint action.

- In matching M , an unmatched pair m - w is **unstable** if man m and woman w prefer each other to current partners.
- Unstable pair m - w could each improve by eloping.

Stable matching: perfect matching with no unstable pairs.

Stable matching problem. Given the preference lists of n men and n women, find a stable matching if one exists.

Stable Matching Problem

Q. Is assignment X-C, Y-B, Z-A stable?

	favorite ↓		least favorite ↓
	1 st	2 nd	3 rd
Xavier	Amy	Bertha	Clare
Yancey	Bertha	Amy	Clare
Zeus	Amy	Bertha	Clare

Men's Preference Profile

	favorite ↓		least favorite ↓
	1 st	2 nd	3 rd
Amy	Yancey	Xavier	Zeus
Bertha	Xavier	Yancey	Zeus
Clare	Xavier	Yancey	Zeus

Women's Preference Profile

Stable Matching Problem

Q. Is assignment X-C, Y-B, Z-A stable?

A. No. Bertha and Xavier will hook up.

	favorite ↓		least favorite ↓
	1 st	2 nd	3 rd
Xavier	Amy	Bertha	Clare
Yancey	Bertha	Amy	Clare
Zeus	Amy	Bertha	Clare

Men's Preference Profile

	favorite ↓		least favorite ↓
	1 st	2 nd	3 rd
Amy	Yancey	Xavier	Zeus
Bertha	Xavier	Yancey	Zeus
Clare	Xavier	Yancey	Zeus

Women's Preference Profile

Stable Matching Problem

Q. Is assignment X-A, Y-B, Z-C stable?

A. Yes.

	favorite ↓		least favorite ↓
	1 st	2 nd	3 rd
Xavier	Amy	Bertha	Clare
Yancey	Bertha	Amy	Clare
Zeus	Amy	Bertha	Clare

Men's Preference Profile

	favorite ↓		least favorite ↓
	1 st	2 nd	3 rd
Amy	Yancey	Xavier	Zeus
Bertha	Xavier	Yancey	Zeus
Clare	Xavier	Yancey	Zeus

Women's Preference Profile

Stable Roommate Problem

Q. Do stable matchings always exist?

A. Not obvious a priori.

↖ is core of market nonempty?

Stable roommate problem (or marriage with one gender).

- $2n$ people; each person ranks others from 1 to $2n-1$.
- Assign roommate pairs so that no unstable pairs.


	<i>1st</i>	<i>2nd</i>	<i>3rd</i>
<i>Adam</i>	B	C	D
<i>Bob</i>	C	A	D
<i>Chris</i>	A	B	D
<i>Doofus</i>	A	B	C

A-B, C-D \Rightarrow B-C unstable
 A-C, B-D \Rightarrow A-B unstable
 A-D, B-C \Rightarrow A-C unstable

Observation. Stable matchings do not always exist for stable roommate problem.

Propose-And-Reject Algorithm

Propose-and-reject algorithm. [Gale-Shapley 1962] Intuitive method that guarantees to find a stable matching.



```
Initialize each person to be free.  
while (some man is free and hasn't proposed to every woman) {  
    Choose such a man m  
    w = 1st woman on m's list to whom m has not yet proposed  
    if (w is free)  
        assign m and w to be engaged  
    else if (w prefers m to her fiancé m')  
        assign m and w to be engaged, and m' to be free  
    else  
        w rejects m  
}
```

Proof of Correctness: Termination

Observation 1. Men propose to women in decreasing order of preference.

Observation 2. Once a woman is matched, she never becomes unmatched; she only "trades up."

Claim. Algorithm terminates after at most n^2 iterations of while loop.

Pf. Each time through the while loop a man proposes to a new woman.

There are only n^2 possible proposals. ■

	1 st	2 nd	3 rd	4 th	5 th
Victor	A	B	C	D	E
Wyatt	B	C	D	A	E
Xavier	C	D	A	B	E
Yancey	D	A	B	C	E
Zeus	A	B	C	D	E

	1 st	2 nd	3 rd	4 th	5 th
Amy	W	X	Y	Z	V
Bertha	X	Y	Z	V	W
Clare	Y	Z	V	W	X
Diane	Z	V	W	X	Y
Erika	V	W	X	Y	Z

$n(n-1) + 1$ proposals required

Proof of Correctness: Perfection

Claim. All men and women get matched.

Pf. (by contradiction)

- Suppose, for sake of contradiction, that Zeus is not matched upon termination of algorithm.
- Then some woman, say *Amy*, is not matched upon termination.
- By Observation 2, *Amy* was never proposed to.
- But, Zeus proposes to everyone, since he ends up unmatched. ▪

Proof of Correctness: Stability

Claim. No unstable pairs.

Pf. (by contradiction)

- Suppose $A-Z$ is an unstable pair: each prefers each other to partner in Gale-Shapley matching S^* .

- **Case 1:** Z never proposed to A .
 - ⇒ Z prefers his GS partner to A .
 - ⇒ $A-Z$ is stable.

men propose in decreasing order of preference

- **Case 2:** Z proposed to A .
 - ⇒ A rejected Z (right away or later)
 - ⇒ A prefers her GS partner to Z .
 - ⇒ $A-Z$ is stable.

women only trade up

- In either case $A-Z$ is stable, a contradiction. ▪

S^*

Amy-Yancey
Bertha-Zeus
...

Summary

Stable matching problem. Given n men and n women, and their preferences, find a stable matching if one exists.

Gale-Shapley algorithm. Guarantees to find a stable matching for **any** problem instance.

Q. How to implement GS algorithm efficiently?

Q. If there are multiple stable matchings, which one does GS find?

Efficient Implementation

Efficient implementation. We describe $O(n^2)$ time implementation.

Representing men and women.

- Assume men are named $1, \dots, n$.
- Assume women are named $1', \dots, n'$.

Engagements.

- Maintain a list of free men, e.g., in a queue.
- Maintain two arrays `wife[m]`, and `husband[w]`.
 - set entry to 0 if unmatched
 - if m matched to w then `wife[m]=w` and `husband[w]=m`

Men proposing.

- For each man, maintain a list of women, ordered by preference.
- Maintain an array `count[m]` that counts the number of proposals made by man m .

Efficient Implementation

Women rejecting/accepting.

- Does woman w prefer man m to man m' ?
- For each woman, create **inverse** of preference list of men.
- Constant time access for each query after $O(n)$ preprocessing.

Amy	1 st	2 nd	3 rd	4 th	5 th	6 th	7 th	8 th
Pref	8	3	7	1	4	5	6	2

Amy	1	2	3	4	5	6	7	8
Inverse	4 th	8 th	2 nd	5 th	6 th	7 th	3 rd	1 st

```
for i = 1 to n
  inverse[pref[i]] = i
```

Amy prefers man 3 to 6
since $\text{inverse}[3] < \text{inverse}[6]$

2 7

Understanding the Solution

Q. For a given problem instance, there may be several stable matchings. Do all executions of Gale-Shapley yield the same stable matching? If so, which one?

An instance with two stable matchings.

- A-X, B-Y, C-Z.
- A-Y, B-X, C-Z.

	1 st	2 nd	3 rd
Xavier	A	B	C
Yancey	B	A	C
Zeus	A	B	C

	1 st	2 nd	3 rd
Amy	Y	X	Z
Bertha	X	Y	Z
Clare	X	Y	Z

Understanding the Solution

Q. For a given problem instance, there may be several stable matchings. Do all executions of Gale-Shapley yield the same stable matching? If so, which one?

Def. Man m is a **valid partner** of woman w if there exists some stable matching in which they are matched.

Man-optimal assignment. Each man receives best valid partner.

Claim. All executions of GS yield **man-optimal** assignment, which is a stable matching!

- No reason a priori to believe that man-optimal assignment is perfect, let alone stable.
- Simultaneously best for each and every man.

Man Optimality

Claim. GS matching S^* is man-optimal.

Pf. (by contradiction)

- Suppose some man is paired with someone other than best partner. Men propose in decreasing order of preference \Rightarrow some man is rejected by valid partner.
- Let Y be **first** such man, and let A be **first** valid woman that rejects him.
- Let S be a stable matching where A and Y are matched.
- When Y is rejected, A forms (or reaffirms) engagement with a man, say Z , whom she prefers to Y .
- Let B be Z 's partner in S .
- Z not rejected by any valid partner at the point when Y is rejected by A . Thus, Z prefers A to B .
- But A prefers Z to Y .
- Thus A - Z is unstable in S . ▪

S
Amy-Yancey
Bertha-Zeus
...

\uparrow
 since this is first rejection
 by a valid partner

Stable Matching Summary

Stable matching problem. Given preference profiles of n men and n women, find a **stable** matching.

no man and woman prefer to be with each other than assigned partner

Gale-Shapley algorithm. Finds a stable matching in $O(n^2)$ time.

Man-optimality. In version of *GS* where men propose, each man receives best valid partner.

w is a valid partner of m if there exist some stable matching where m and w are paired

Q. Does man-optimality come at the expense of the women?

Woman Pessimality

Woman-pessimal assignment. Each woman receives worst valid partner.

Claim. GS finds **woman-pessimal** stable matching S^* .

Pf.

- Suppose $A-Z$ matched in S^* , but Z is not worst valid partner for A .
- There exists stable matching S in which A is paired with a man, say Y , whom she likes less than Z .
- Let B be Z 's partner in S .
- Z prefers A to B . ← man-optimality
- Thus, $A-Z$ is an unstable in S . ▪

S
Amy-Yancey
Bertha-Zeus
...

Other well-known extensions

Stable roommate problem

- Single gender

College admission problem

- Multiple matchings

Hospital admission problem*

- Matching residents to hospital

Stable matching with multiple genders*

- Traditional marriage: binary
- Futuristic marriage: k-ary

Matching Residents to Hospitals

Goal. Given a set of preferences among hospitals and medical school students, design a **self-reinforcing** admissions process.

Unstable pair: applicant x and hospital y are **unstable** if:

- x prefers y to its assigned hospital.
- y prefers x to one of its admitted students.

Stable assignment. Assignment with no unstable pairs.

- Natural and desirable condition.
- Individual self-interest will prevent any applicant/hospital deal from being made.

Extensions: Matching Residents to Hospitals

Ex: Men \approx hospitals, Women \approx med school residents.

Variant 1. Some participants declare others as unacceptable.

Variant 2. Unequal number of men and women.

resident A unwilling to work in Cleveland

Variant 3. Limited polygamy.

hospital X wants to hire 3 residents

Variant 4. Couple

Def. Matching S **unstable** if there is a hospital h and resident r such that:

- h and r are acceptable to each other; and
- either r is unmatched, or r prefers h to her assigned hospital; and
- either h does not have all its places filled, or h prefers r to at least one of its assigned residents.

Application: Matching Residents to Hospitals

NRMP. (National Resident Matching Program)

- Original use just after WWII. ← predates computer usage
- Ides of March, 23,000+ residents.

Rural hospital dilemma.

- Certain hospitals (mainly in rural areas) were unpopular and declared unacceptable by many residents.
- Rural hospitals were under-subscribed in NRMP matching.
- How can we find stable matching that benefits "rural hospitals"?

Rural Hospital Theorem. Rural hospitals get exactly same residents in every stable matching!

Application: Stable Marriage with Multiple Genders

Jan. 1, 2019

Germany introduces third gender for people who identify as intersex

People who do not fit biological definition of male or female can now choose category 'diverse' on official documents

Maya Oppenheim | @mayaoppenheim | 2 days ago | 245 shares |



Jan. 3, 2019

New York City birth certificates get gender-neutral option

By Evan Simko-Bednarski, CNN
Updated 5:10 PM ET, Thu January 3, 2019



New York City has changed its policy on gender designation for birth certificates.

More from CNN

- Teen charged after fatal egg-throwing prank
- Apple won't be the last casualty of China's slowdown

Switch now and get \$300 off iPhone, on us.

With select trade-in. For a limited time. [Learn more >](#)

verizon

GENDER IDENTITY

People should use public restrooms according to:




- The biological sex on their birth certificate **43%**
- The gender with which they identify **41%**
- Don't know **16%**

Classic Marriage: stable marriage with k genders

When $k=2$, it is the classic marriage.

E.g., M: male, W: female, U: undecided

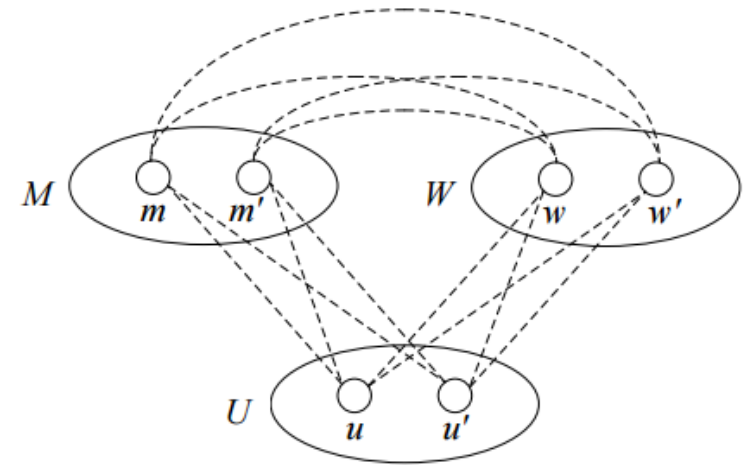

Theorem (Wu 2016): There exists preference lists under which there exists no stable binary matching with $k (>2)$ genders.

Proof: Suppose u in a node (in a gender) that is ranked the lowest by all. In all other $k-1$ gender sets, each node x is ranked the top by exactly another node from a different gender in these $k-1$ genders, any marriage between u and x is unstable!

Result holds even if self-matching is allowed, e.g., nodes in U can match each other.

$$\begin{array}{ll}
 \{(m, w), (m', u), (w', u')\} & \{(m, w), (m', u'), (w', u)\} \\
 \{(m, w'), (m', u), (w, u')\} & \{(m, w'), (m', u'), (w, u)\} \\
 \{(m, u), (m', w), (w', u')\} & \{(m, u), (m', w'), (w, u')\} \\
 \{(m, u'), (m', w), (w', u)\} & \{(m, u'), (m', u), (u', w)\}
 \end{array}$$

Futuristic Marriage: stable k-ary marriage with k genders

K-ary matching: (u_1, u_2, \dots, u_k) (k: the number of genders)

Iterative Binding: Iteratively apply GS to pair wisely and bind all disjoint sets through a spanning tree.

Theorem (Wu 2016): The iterative GS constructs a stable k-ary matching.

Blocking family (for instability): if each member prefers each member of that family to its current family.

·E.g., current matching is $\{(m, w, u), (m', w', u')\}$, (m', w, u) is a blocking family if m' prefers w and u and both w and u prefers m'

J. Wu, "Stable Matching Beyond Bipartite Graphs," (APDCM) (in conjunction with IEEE IPDPS 2016)